

Start Your Living up!



Convenience • Caring • Comfort

Automation Solution

- Light Control
- Door / Window Status Indicator
- Power Curtain Control
- Gate Opener
- Accessories
- Gateway



Start Your Living up!



www.livinup.com.tw



www.lgreen.com.tw




www.tgmlink.com



Catalog

Factory
G-LIGHT TECHNOLOGIES CO.,LTD.
📍 NO.56, Kai-An 3rd St., Tainan City 70945, Taiwan
☎ +886) 6-357-0037 📠 +886) 6-357-0036
✉ jessica@lighttech.com

Taipei office
TGM TECHNOLOGIES CO.,LTD.
📍 20F-10, NO.97, Sec.1, Xintai 5th Rd., Xizhi Dist.,
New Taipei City 221, Taiwan
☎ +886) 2-2697-6606
✉ service@tgmlink.com

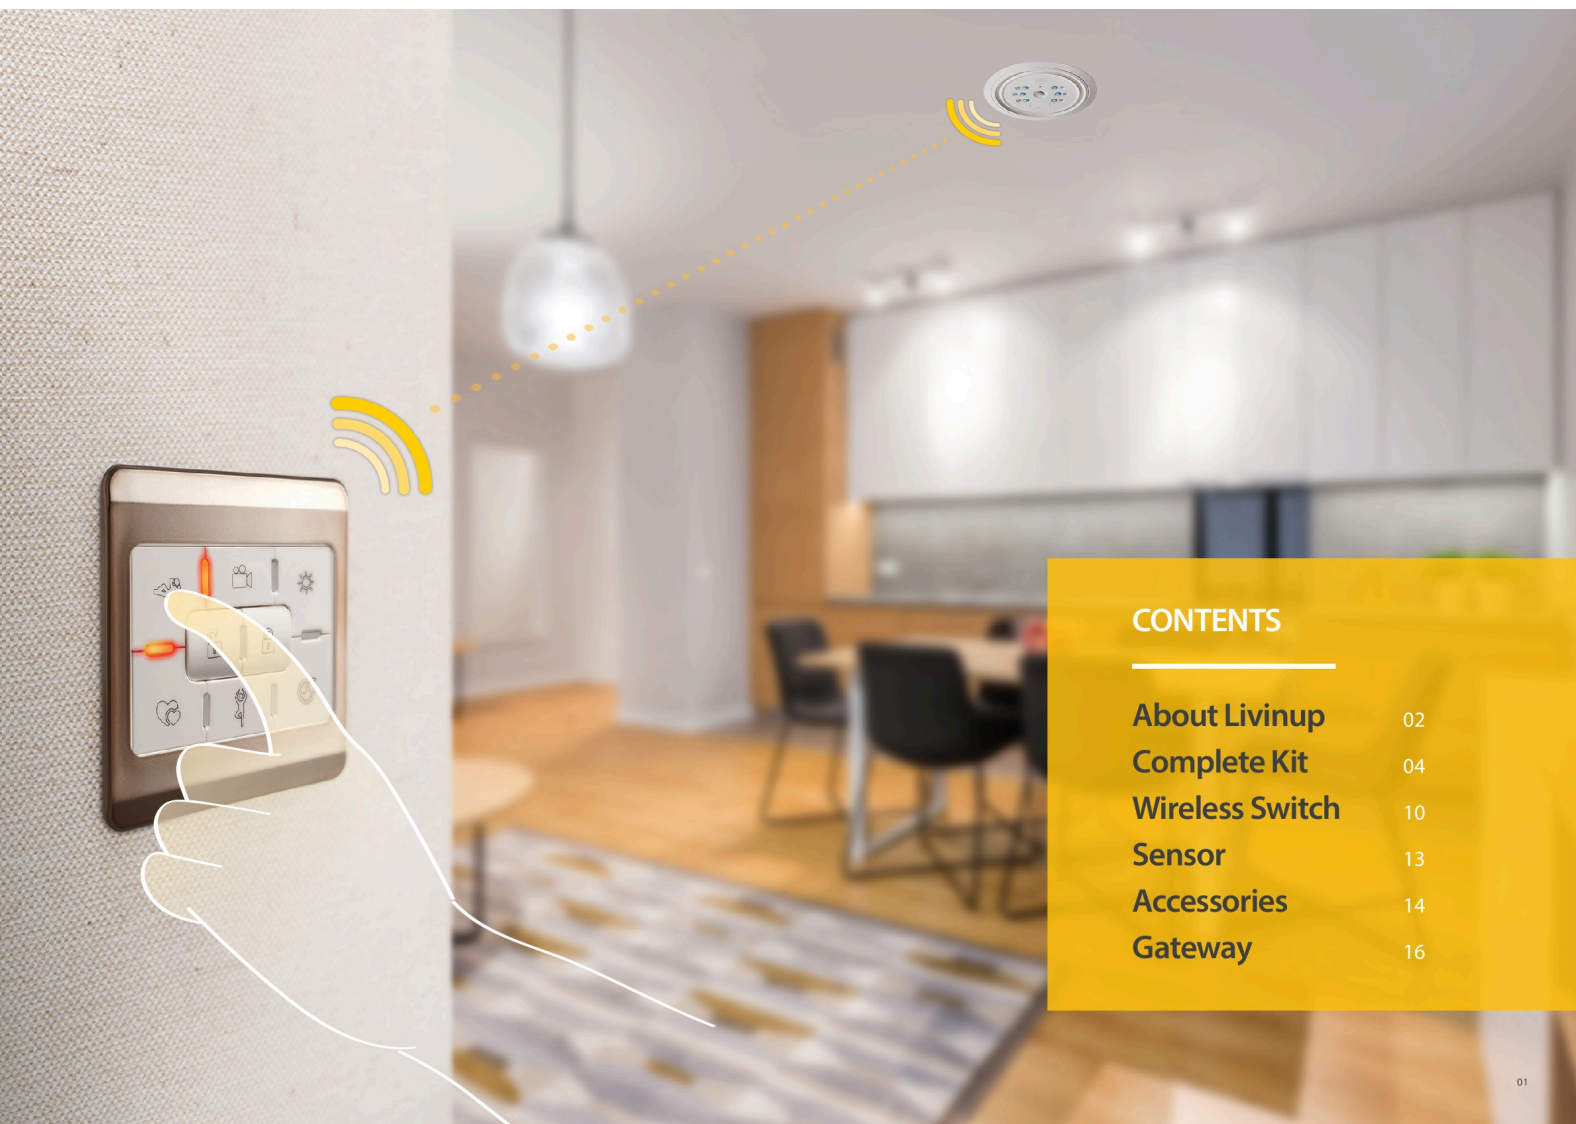

CONTENTS

About Livinup	02
Complete Kit	04
Wireless Switch	10
Sensor	13
Accessories	14
Gateway	16

Wireless Light Control Premium Set

LU-CK-005-01

Features

3 Channel of light control.
Easy to click into the ceiling.
Optional for any wireless door sensor, daylight sensor and motion sensor.

Description

3 channel control module x 1
Wireless 3 gang light switch with master OFF x 2

Spec.

Control Module :

90V-250VAC, 50 / 60Hz
Maximum load : 300W / 110V , 600W / 220V per channel

Wireless Devices :

3V, CR2032 coin batteries
433.92MHz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation

CE, EMC, FCC and RCM approved



Home Automation System DIY Set

LU-CK-008-01

Features

AC plug-in for easy installation.
Battery backup.
Emergency flashlight when disconnect power.
Night light.
Door bell, call help and panic.
Door sensor status indicator.

Description

DIY control module x 1
Wireless door bell x 1
Wireless door sensor x 1
Wireless wrist remote x 1

Spec.

Control Module :

90V-250VAC, 50 / 60Hz

Wireless Devices :

3V, CR2032 coin batteries
433.92MHz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation

CE, EMC, FCC and RCM approved



Wireless Light Control

LU-CK-004-01

Features

3 channel of light control.
Suitable specific areas installation 3 channel at once.
Optional for any wireless door sensor, daylight sensor and motion sensor.

Description

3 channel control module x 1
Wireless 3 gang light switch with master OFF x 2

Spec.

Control Module :

90V-250VAC, 50 / 60Hz
Maximum load : 300W / 110V , 600W / 220V per channel

Wireless Devices :

3V, CR2032 coin batteries
433.92MHz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation

CE, EMC, FCC and RCM approved



Wireless Light Control Quick Set

LU-CK-001-01

Features

1 channel of light control.
Easy to start and install.
Optional for any wireless door sensor, daylight sensor and motion sensor.

Description

1 channel control module x 1
Wireless 1gang light switch(piano type) x 1

Spec.

Control Module :

90V-250VAC, 50 / 60Hz
Maximum load : 500W / 110V , 1000W / 220V

Wireless Devices :

3V, CR2032 coin batteries
433.92MHz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation

CE, EMC, FCC and RCM approved



Wireless Dimmable Light Control (0-10V) Quick Set

LU-CK-003-01

Features

Easy to adapt to 0-10V of dimmable LED lights.
Dimming up and down with button press.
Smart memorized last dim level.

Description

1 channel dimmable control module x 1
Wireless dimmable light switch x 1

Spec.

Control Module :
AC input : 90V-250VAC, 50 / 60Hz
Dimm output : 0-10VDC

Wireless Devices :
3V CR2032 coin batteries
433.92Mhz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RCM approved



Wireless Dimmable Light Control (triac) Quick Set

LU-CK-002-01

Features

Universal to suit any dimmable lights.
Easy to start and install.
Dimming up and down with button press.
Smart memorized last dim level.

Description

1 channel dimmable control module x 1
Wireless dimmable light switch x 1

Spec.

Control Module :
90V-250VAC, 50 / 60Hz
Maximum load : 150W / 110V, 300W / 220V

Wireless Devices :
3V CR2032 coin batteries
433.92Mhz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RCM approved



Wireless Garage Door Opener

LU-CK-009-01

Features

Wireless Garage Door Opener
Universal compatible with rolling type
3 button switch for Up, Down, Stop Control.

Description

3 relay control module x1
Wireless 3 button switch x1

Spec.

Control Module :
90V-250VAC, 50 / 60Hz
Maximum load : 300W / 110V,
600W / 220V per channel

Wireless Devices :
3V CR2032 coin batteries
433.92Mhz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RCM approved



Door / Window Status Indicator

LU-CK-010-01

Features

Sleek design compatible with existing security control modules.
Allowing the capability to monitor each door / window's status.

Spec.

Control Module :
12VDC
4 dry contacts.

Wireless Devices :
3V CR2032 coin batteries
433.92Mhz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RCM approved



Wireless Curtain Control

LU-CK-011-01

Features

Wireless Curtains
Universal compatible with curtain motor control output.
3 button switch for Up, Down, Stop Controlling.

Description

Receiver module x1
Wireless 3 button switch x1

Spec.

Control Module :
12VDC
8 output.

Wireless Devices :
3V CR2032 coin batteries
433.92Mhz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RCM approved



Wireless Switch

- Wireless switches are designed to solve existing cable installation problems and reduce cost.
- Multiple combination for setting up different light mode or group control.
- The master OFF function gives you the ability to turn all the lights OFF at single press of a button.
- Available in different style to suit individual customer requirements.
- The wireless switch enables you to place a light switch where ever you require.
- Low current consumption.
- Precise transmission.




Classic Style

RL-TX-E01-01 **RL-TX-E04-01**
RL-TX-E02-01 **RL-TX-E05-01**
RL-TX-E03-01 **RL-TX-E06-01**

Description
 1 gang ~ 6 gang
 Available for Master On / Off

Spec.
 3V, CR2032 coin batteries
 433.92MHz
 60 meters depends on atmospheric conditions
 3 years of battery life under normal operation
 CE, EMC, FCC and RCM approved



Wireless Switch

Stylish Style

RL-TX-H01-01 **RL-TX-H05-01**
RL-TX-H02-01 **RL-TX-H06-01**
RL-TX-H03-01 **RL-TX-H07-01**
RL-TX-H04-01 **RL-TX-H08-01**

Description
 1 gang ~ 8 gang
 Available for Master On / Off

Spec.
 3V, CR2032 coin batteries
 433.92MHz
 60 meters depends on atmospheric conditions
 3 years of battery life under normal operation
 CE, EMC, FCC and RCM approved



Piano Style

RL-TX-G01-01 **RL-TX-G03-01**
RL-TX-G02-01

Description
 1 gang ~ 3 gang

Spec.
 3V, CR2032 coin batteries
 433.92MHz
 60 meters depends on atmospheric conditions
 3 years of battery life under normal operation
 CE, EMC, FCC and RCM approved



Accessories

- We also have various bridge/interface to support PC, smartphone, cloud applications.
- Free APP download for smart phone operation.
- Smart capability for different wireless devices enabling you to upgrade your automation system.

Repeater

GW-RP-001-01

Description

For the extension of the system, it can be used as a repeater or a bridge between two systems.

Spec.

Included optional switching power cube adaptor



Wireless Door Bell

GW-DB-001-01

Description

For the extension of the system, it can be used as a door bell or a door bell.

Spec.

4x AA (not included)
433.92MHz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RoHS approved



Wireless call help / panic switch

GL-PN-002-01

Description

Call to help / panic switch you need. Compatible home automation system.

Spec.

4x AA (not included)
433.92MHz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RoHS approved



Wireless wrist call help / panic remote

GL-PN-001-01

Description

Call to help / panic remote. Compatible home automation system.

Spec.

4x AA (not included)
433.92MHz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RoHS approved



Wireless 2 button switch with master ON / OFF

Description

For customized utilization like turn on / off motor compressors. Giving master ON/OFF command for machines.

Spec.

4x AA (not included)
433.92MHz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RoHS approved



Wireless Remote Control

GL-TX-A01-01

Description

4 button of remote control. Available for different combination to suit customer requirements. Can be compatible with light control, gate control or alarm system.

Spec.

4x AA (not included)
433.92MHz
60 meters depends on atmospheric conditions
3 years of battery life under normal operation
CE, EMC, FCC and RoHS approved



AC / DC power adaptor

GL-PW-001-01

Description

AC / DC switching power adaptor. Suitable for wireless switch. Easy to adapt mechanical wireless switch.

Spec.

100W, 250VAC input
5VDC output





Mounting Plate

RL-MT-C01-01

Description
European size and color printing
Black/White



Mounting Plate

RL-MT-B01-01

Description
European size mounting plate
Black/White



Mounting Plate

RL-MT-A01-01

Description
US size mounting plate
117x77mm

Sensor

- Wireless sensor is stable and its slim design can easily be mounted anywhere.
- It solves the wire / pipe exposure problem of traditional wired devices.
- Giving full flexibility and allowing the ability to automatically turn lights in different scenes.

Wireless Daylight Sensor

RL-LS-C01-01

Description
Automatically turns on the lights for a preset period when darkness is detected.

Spec.
3x CR-123A battery
433MHz
All scenes depends on atmospheric conditions
1 year of battery life under normal operation
CE, EMC, FCC and RoHS approved



Wireless Motion Sensor (DC version)

RL-PR-C01-01

Description
Automatically turns on the lights for a preset period when movement is detected.

Spec.
3x CR-123A battery
433MHz
All scenes depends on atmospheric conditions
1 year of battery life under normal operation
CE, EMC, FCC and RoHS approved



Wireless Door / Window Sensor

SQ-DS-C01-01

Description
Once the door/window is opened, it sends the signal to receiver module to turn on lights automatically or trigger the alarm.

Spec.
3x CR-123A battery
433MHz
All scenes depends on atmospheric conditions
1 year of battery life under normal operation
CE, EMC, FCC and RoHS approved



Wireless Motion Sensor (AC version)

RL-PR-D01-01

Description
Automatically turns on the lights for a preset period when movement is detected.

Spec.
240V AC/200V AC/100V AC
433MHz
All scenes depends on atmospheric conditions
CE, EMC, FCC and RoHS approved

